

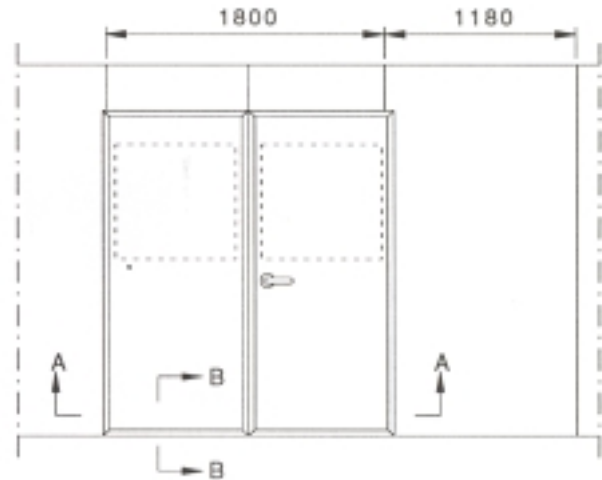



Aluminium door, type ALUMAN or similar product.
 Thickness = 50 mm.
 Door panel of polyester painted steel plate.
 Insulation: Mineral wool.
 Lock : ASSA 565, including door handle but excluding cylinder.
 Door frame: Aluminium profile
 Sound reduction: 30 dB
 Door leaf available with window.
 Optional: Door closer ANCOR 924 ÖB

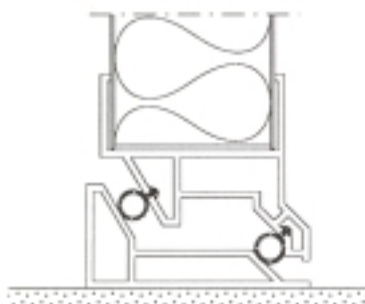

Aluminium door, type ALUMAN or similar product.
 Thickness = 50 mm.
 Door panel of polyester painted steel plate.
 Insulation: Mineral wool.
 Lock : ASSA 565, including door handle but excluding cylinder.
 Cremorne bolt Fix 560/13
 Door frame: Aluminium profile
 Sound reduction: 30 dB
 Door leaf available with window.
 Optional: Door closer ANCOR 924 ÖB

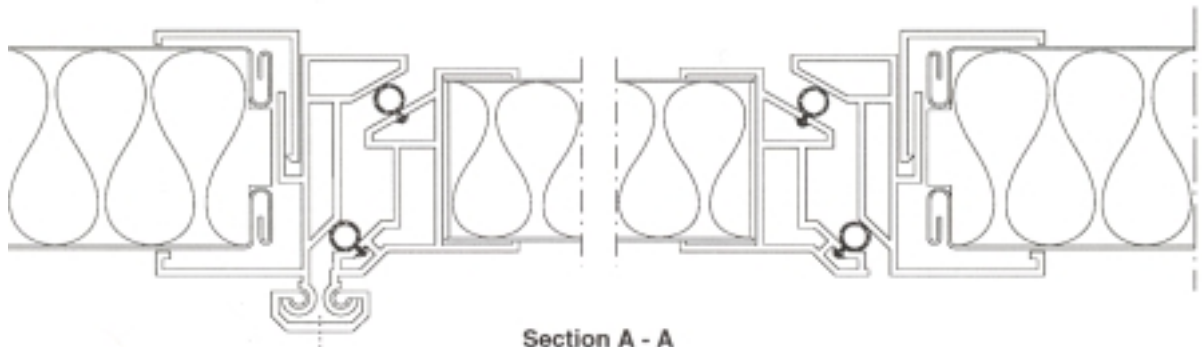

Section B - B



Alternative solutions of sills.

The technical information given in this publication was accurate in time for the publication. We will reserve us for changes which depends on our forth going product development. Latest available technical information regarding products will be given on request.